

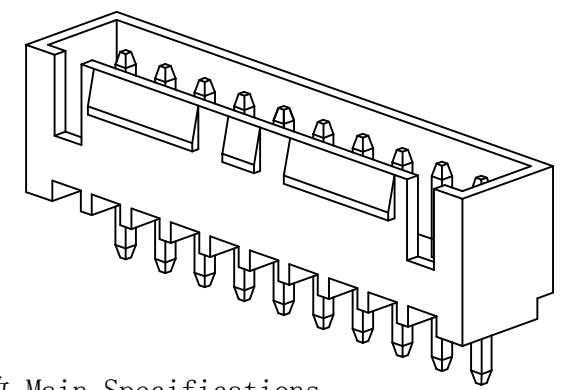



REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.08.10

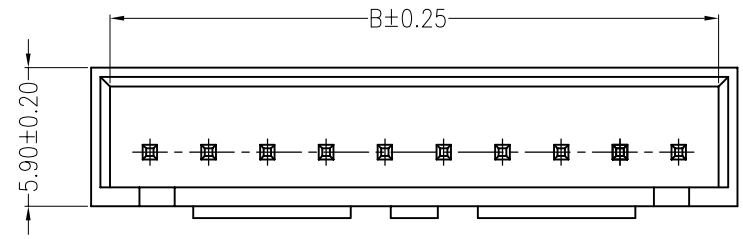

主要技术参数 Main Specifications

- 线数 (Poles): 02 to 16
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

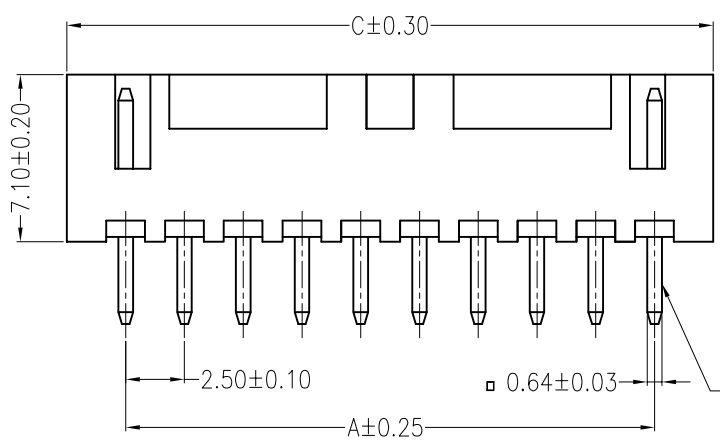


ORDER INFORMATION:

A2502A--A5WA-P**

Part No. _____
 No. of Circuits: _____
 02~16
 PLASTIC MATERIAL: _____
 A5W=PA66 (WHITE)

PACKAGING:
 P=PE
PLATING:
 A=Sn

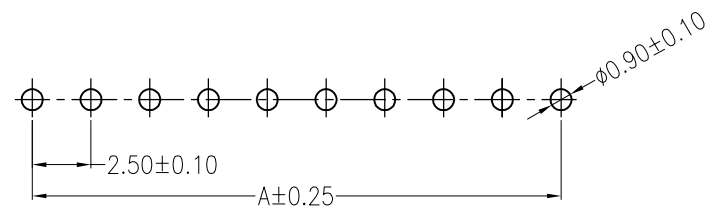

**SUGGESTED PCB LAYOUT
(COMPONENT SIDE)**

Circuits	Dimensions (mm)		
	A	B	C
02	2.50	6.00	7.50
03	5.00	8.50	10.00
04	7.50	11.00	12.50
05	10.00	13.50	15.00
06	12.50	16.00	17.50
07	15.00	18.50	20.00
08	17.50	21.00	22.50
09	20.00	23.50	25.00
10	22.50	26.00	27.50
11	25.00	28.50	30.00
12	27.50	31.00	32.50

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2~16 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA66	UL 94V-0, COLOR:WHITE

JKUN 温州健坤接插件有限公司
WENZHOU JKUN CONNECTOR CO., LTD.

TITLE: -
 2.5mmPITCH 180°WAFER DIP TYPE

PART NO.:
 A2502A-**-A5WA-P

DWG NO.:
 JKUN/GCCP-0545

SCALE: 1 : 1 SHEET: 1 / 1

USE: CUSTOMER
 APPD: 邵敬和
 CHKD: 田峰
 DR: 吴丹平

UNITS: mm