

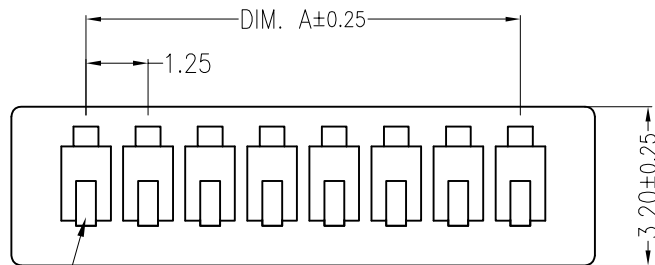


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	NEW RELEASE	吴丹平	2017.10.12

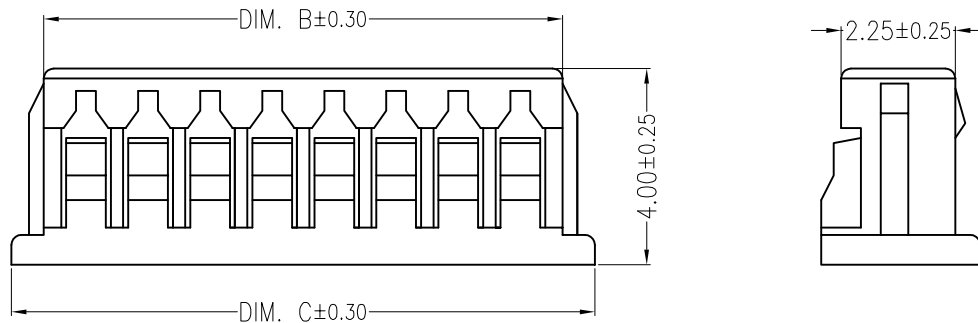


Circuit 1

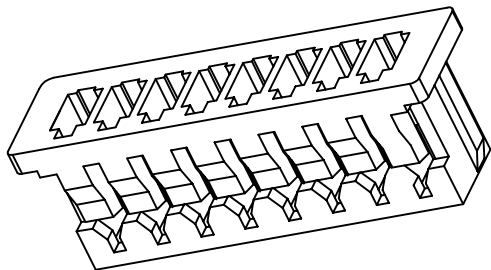

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
 额定电压 (Rated voltage): 125 V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

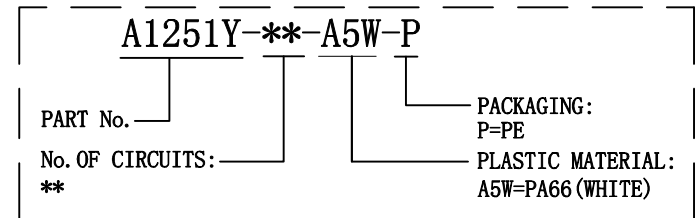

Circuits	Dimensions(mm)		
	DIM. A	DIM. B	DIM. C
02	1.25	3.00	4.25
03	2.50	4.25	5.50
04	3.75	5.50	6.75
05	5.00	6.75	8.00
06	6.25	8.00	9.25
07	7.50	9.25	10.50
08	8.75	10.50	11.75
09	10.00	11.75	13.00
10	11.25	13.00	14.25
11	12.50	14.25	15.50
12	13.75	15.55	16.75
13	15.00	16.75	18.00
14	16.25	18.00	19.25
15	17.50	19.25	20.50
16	18.75	20.50	21.75

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	HOUSING	1~16 PCS	PA66	COLOR:WHITE

JKUN温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE: A1251Y 1.25mmPITCH Housing	
.X±0.35	X.±	USE: CUSTOMER	PART NO.:	
.XX±0.25	.X±	APPD: 邵敬和	A1251Y-**-A5W-P	
.XXX±0.15	.XX±	CHKD: 田峰	DWG NO.:	
--	--		JKUN/GCCP-0510	
UNITS: mm		DR: 吴丹平	SCALE	SHEET
			1 : 1	1 / 1